




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> : <b>H04R 25/00, 25/02</b>	<b>A1</b>	(11) International Publication Number: <b>WO 00/42815</b> (43) International Publication Date: 20 July 2000 (20.07.00)
<p>(21) International Application Number: PCT/US00/00830</p> <p>(22) International Filing Date: 12 January 2000 (12.01.00)</p> <p>(30) Priority Data: 09/231,282 15 January 1999 (15.01.99) US</p> <p>(71) Applicant: SONIC INNOVATIONS [US/US]; 2795 East Cottonwood Parkway, Suite 660, Salt Lake City, UT 84121 (US).</p> <p>(72) Inventor: BRIMHALL, Owen, D.; 11217 South Crescentridge Circle, South Jordan, UT 84095 (US).</p> <p>(74) Agent: NEUGEBOREN, Craig, A.; Lyon &amp; Lyon LLP, 633 West Fifth Street, Suite 4700, Los Angeles, CA 90071-2066 (US).</p>	<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>	

(54) Title: CONFORMAL TIP FOR A HEARING AID

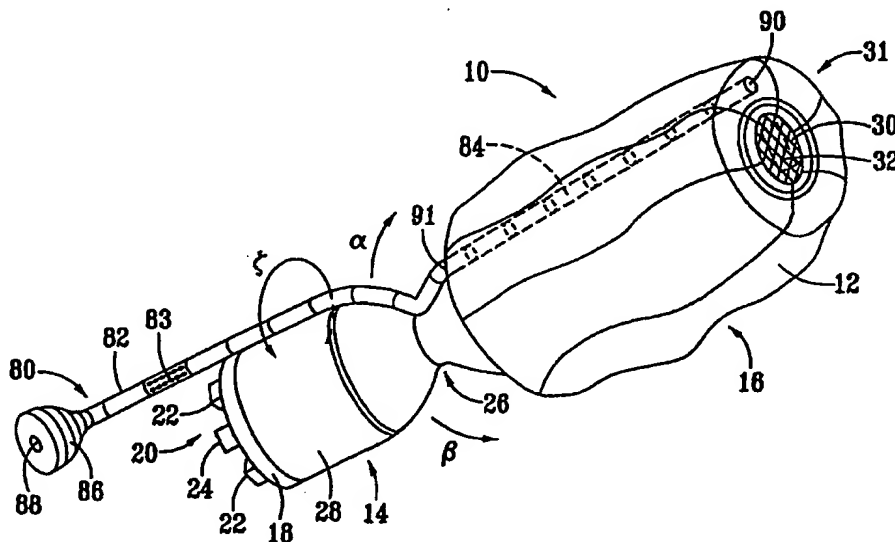

## (57) Abstract

A completely in-the-canal hearing device includes a distal receiver module (44) having a rigid housing. A conformal tip (12) surrounds the receiver module housing, and includes an elastic membrane (12) defining an internally isolated volume filled with a compliant material (40). The outer circumference of the conformal tip is slightly larger than the inner circumference of the ear canal, so as to provide an acoustic seal to help eliminate the product feedback.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## DESCRIPTION

### Conformal Tip For A Hearing Aid

#### Field of the Invention

The present invention pertains to hearing aids. More particularly, the present invention pertains to conformal tips for hearing aids.

#### Background of the Invention

The modern trend in the design and implementation of hearing devices is focusing to a large extent on reducing the physical size of the hearing device. Miniaturization of hearing device components is becoming increasingly feasible with rapid technological advances in the fields of power supplies, sound processing electronics and micro-mechanics. The demand for smaller and less conspicuous hearing devices continues to increase as a larger portion of our population ages and faces hearing loss. Those who face hearing loss also encounter the accompanying desire to avoid the stigma and self consciousness associated with this condition. As a result, smaller hearing devices which are cosmetically less visible are increasingly sought after.

Hearing device technology has progressed rapidly in recent years. First generation hearing devices were primarily of the Behind-The-Ear (BTE) type, where an externally mounted device was connected by an acoustic tube to a molded shell placed within the ear. With the advancement of component miniaturization, modern hearing devices rarely use this Behind-The-Ear technique, focusing primarily on one of several forms of an In-The-Canal hearing device. Three main types of In-The-Canal hearing devices are routinely offered by audiologists and physicians. In-The-Ear (ITE) devices rest primarily in the concha of the ear and have the disadvantages of being fairly conspicuous to a bystander and relatively bulky to wear. Smaller In-The-Canal (ITC) devices fit partially in the concha and partially in the ear canal and are less visible but still leave a substantial portion of the hearing device exposed. Recently, Completely-In-The-Canal (CIC) hearing devices have come into greater use. As the name implicates, these devices fit deep within the ear canal and are essentially hidden from view from the outside.

In addition to the obvious cosmetic advantages these types of in-the-canal devices provide, they also have several performance advantages that larger, externally mounted devices do not offer. Placing the hearing device deep within the ear canal and proximate to the tympanic membrane (ear drum) improves the frequency response of the device,

reduces distortion due to jaw extrusion, reduces the occurrence of the occlusion effect and improves overall sound fidelity.

The shape and structure, or morphology, of the ear canal varies from person to person. However, certain characteristics are common to all individuals. When viewed in the transverse plane, the path of the ear canal is extremely irregular, having several sharp bends and curves. It is these inherent structural characteristic which create problems for the acoustic scientist and hearing device designer.

For general discussion purposes, the ear canal can be broken into three main segments. The external and medial segments are both surrounded by a relatively soft cartilaginous tissue. The external segment is largely visible from the outside and represents the largest cavity of the ear canal. The innermost segment of the ear canal, closest to the tympanic membrane, is surrounded by a denser bony material and is covered with only a thin layer of soft tissue. The bony material allows for little expansion to occur in this region compared with the cartilaginous regions of the external and medial segments of the ear canal. In addition to being surrounded by cartilage rather than bone, these areas are covered with a substantially thicker tissue layer. As such, pressure exerted by an ITC hearing device on the inner bony region of the canal can lead to discomfort and/or pain to an individual, especially when a deep insertion technique is used.

Since the morphology of the ear canal varies so greatly from person to person, hearing aid manufacturers and audiologists have employed custom manufactured devices in order to precisely fit the dimensions of each user's ear canal. This frequently necessitates impressions of the user's ear canal to be taken. The resulting mold is then used to fabricate a rigid hearing device shell. This process is both expensive and time consuming and the resulting rigid device shell does not perform well during the deformations of the ear canal shape that occurs during normal jaw movement. In order to receive a properly fit hearing device, the user typically has to make several trips to the audiologist for reshaping and resizing. Even after the best possible fit is obtained, the rigid shell rarely provides comfortable hearing enhancement at all times.

Further, because the resulting hearing aid device shell is typically formed from a hard acrylic material, discomfort to the user is typical when worn for extended periods of time. The inability of the hard shell to conform to normal ear canal deformations can cause it to become easily dislodged from its proper position. Consequently, the quality of the hearing enhancement suffers. Furthermore, due to the added manufacturing costs, it is desirable to utilize a hearing device that is at least partially formed from an off-the-shelf or pre-formed component readily available to the audiologist or physician.

While the performance of CIC hearing devices are generally superior to other larger and less sophisticated devices, several problems remain prevalent. Complications typically arise as a result of the small size of CIC hearing devices and the depth to which they are inserted into a user's ear canal.

5 For example, because a CIC hearing device forms an essentially air tight seal between the tip of the hearing device and the walls of the ear canal, discomfort to a user is common. This acoustic seal prevents the equalization of pressure between the internal chamber formed between the tympanic membrane and the hearing device, and the ambient environment. Due to the sensitivity of the tympanic membrane, even small pressure  
10 differentials can cause severe discomfort.

Further, due to their small size and positioning within the ear canal, CIC hearing devices can cause handling problems, making insertion and removal by a user difficult and cumbersome.

U.S. Patent No. 5,701,348, entitled "Articulated Hearing Device" ("the '348  
15 patent"), discloses a segmented hearing device with several articulating and non-contiguous parts. The hearing device of the '348 patent includes a rigid receiver module with a surrounding acoustic seal. The acoustic seal of the '348 patent includes a sheathing made from a singular piece of foam or silicone which compresses when inserted into the deep regions of an ear canal. The '348 patent also describes the use of this sealing  
20 mechanism as an anchor so that the remaining articulating components of the hearing device can move freely and adjust to the changing morphology of the ear canal.

While generally conforming to the shape of an ear canal when inserted, this device still presents comfort problems during insertion and removal due to its single piece construction of the sealing mechanism. Also, due to the single piece construction of this  
25 sealing device, the quality of the acoustic seal degrades over time and during prolonged use. The ability to effectively interchange and clean the sealing material is also compromised. Further, the device taught by the '348 patent is not conducive to use with a completely in the canal hearing device (CIC) where the acoustic seal is the only point of contact with the ear canal. Compression of the sealing material reduces the volume of the  
30 foam and the sealing properties are accordingly diminished.

U.S. Patent No. 5,395,168, entitled "In the Ear Hearing Aid Having Extraction Tube Which Reduces Acoustic Feedback" ("the '168 patent"), discloses an in-the-ear hearing device which incorporates a retrieval system mechanically attached to the hearing device body. The retrieval cord is also presented as a hollow acoustic tube to aid in  
35 reducing acoustic feedback. In order to reduce acoustic feedback, the acoustic tube

disclosed in the '168 patent extends into the receiver housing and engages with the receiver elements.

While aiding in the reduction of acoustic interference, this device also presents comfort problems during insertion and removal due to the lack of a venting or pressure  
5 equalization system between the inner chamber formed by the hearing device, and the ambient environment.

#### Summary of the Invention

In accordance with a first aspect of the present invention, a hearing device includes a receiver module having a substantially rigid housing with an outer surface. the receiver  
10 module is provided with a removable conformal tip having a generally tubular body configured to snugly fit over, and substantially cover, the outer surface of the receiver module housing. The conformal tip comprises a substantially elastic membrane enclosing a substantially non-compressible, compliant material. In this manner, the conformal tip helps retain the receiver module in the inner portion of an ear canal, the respective receiver  
15 module and conformal tip forming a substantially tight acoustic seal.

As will be apparent to those skilled in the art, other and further aspects and advantages of the present invention will appear hereinafter.

#### Brief Description of the Drawings

The drawings illustrate both the design and utility of the preferred embodiments of  
20 the present invention, in which similar elements in different embodiments are referred to by the same reference numbers for purposes of ease in illustration of the invention, wherein:

Fig. 1 is a perspective view of a first preferred embodiment of a completely in-the-  
canal (CIC) hearing device utilizing a conformal tip constructed in accordance with the  
25 present invention;

Fig. 2 is a cross section taken along the length of the hearing device of Fig. 1;

Fig. 3 is a cross section taken along the line A-A in Fig. 2;

Fig. 4 is an exploded cross section of the hearing device of Fig. 1;

Fig. 5 is a cross sectional view of the hearing device of Fig. 1, taken as it would fit  
30 within a user's ear canal;

Fig. 6 is a cross sectional view of a preferred embodiment of an in-the-canal (ITC)  
hearing device utilizing a conformal tip constructed in accordance with the present  
invention.

Fig. 7 is an exploded perspective view of a second preferred embodiment of a completely in-the-canal (CIC) hearing device utilizing a conformal tip constructed in accordance with the present invention; and

Fig. 8 is a perspective view of the hearing device of Fig. 7 as it engages within the conformal tip.

#### Detailed Description of the Preferred Embodiments

FIG. 1 shows a perspective view of a completely in-the-canal (CIC) hearing device 10 utilizing a preferred embodiment of a conformal tip 12. The CIC hearing device 10, includes a main module 14 connected to a receiver module 16 by an articulating joint 26, which allows the main module 14 to pivot and rotate relative to the receiver module 16. Possible directions of movement of the main module 14 are represented by arrows  $\alpha$ ,  $\beta$  and  $\delta$ .

The main module 14 preferably comprises a rigid shell 28 formed, e.g., from a plastic, thermoplastic or other polycarbonate material. The rigid shell (or housing) 28 provides a lightweight, durable, bio-compatible housing for internal components of the main module 14, including a power source 36 and sound processing electronics 46 (seen in FIG. 2). Alternately, the main module 14 can be formed from a medical grade stainless steel or other bio-compatible and moisture resistant material. Notably, the housing 28 provides protection of the internal components from moisture, dirt, and oil from cerumen (ear wax).

The main module 14 further includes a removable faceplate 18 covering an open end 20 of the housing 28 distal to the articulating joint 26. The faceplate 18 allows access to the components mounted inside of the main module 14. Located on the exterior of the faceplate 18 are controls 22 and a microphone 24. Briefly, the controls 22 provide the ability to adjust volume, sensitivity, or sound processing schemes.

The conformal tip 12 substantially surrounds the exterior surface of the receiver module 16. In particular, the conformal tip 12 mounts and acoustically seals the hearing device 10 within the deep bony region of the ear canal and in close proximity to the tympanic membrane. Exposed on the distal end 31 of the receiver module 16 is a replaceable filter 30. A speaker 32 (shown as broken lines located behind the filter 30) operates within the receiver module 16.

A conduit 80 serves as both a vent and a retrieval cord for the hearing device 10, and additionally aids in minimizing acoustic feedback. The conduit 80 comprises a proximally extending tubular body portion 82 mounted along the external surface of the main module 14, and an internal distal lumen portion 84 extending through the conformal

tip 12. The tubular body portion 82 forms an internal lumen 83 extending from a proximal opening 88 of the tubular body portion 82 to a proximal opening 91 of the internal lumen portion 84. The internal lumen portion 84 extends from its proximal opening 91 to a distal opening 90 located in the distal end 31 of the receiver module 16. The respective lumens  
5 83 and 84 are in communication with each other to thereby form a substantially uniform passage from the proximal opening 88 of the tubular body portion 82 to the distal opening 90 of the internal lumen. The proximal portion of the tubular body 82 is preferably formed from a substantially rigid material and is physically bonded to the main module 14.

In particular, when the hearing device 10 is inserted deeply into an ear canal, the  
10 conduit 80 allows air and sound waves to flow freely between a chamber formed between the distal end 31 of the receiver module 16 and the tympanic membrane, and the ambient air. Due to the air tight seal formed between the conformal tip 12 and the ear canal wall, pressure builds up in the deep portion of the ear canal, near the tympanic membrane (indicated by reference number 98 in Fig. 5). The passage created by the conduit 80  
15 prevents an increase in this pressure by acting as a vent between the deep portions of the ear canal and the ambient air.

In addition to providing a pressure vent for the hearing device 10, the conduit 80 also allows a user, physician or audiologist to easily insert and remove the hearing device 10 from within the ear canal. In particular, the proximal end of tubular body portion 82  
20 extends proximally (i.e., towards the opening of the ear when the device is inserted in an ear canal) beyond the operative end 20 of the main module 14. This proximally extending portion of the tubular body portion 82 is preferably long enough so that the wearer can grasp it securely between two fingers and remove (i.e., pull) the hearing device 10 from the ear canal. The proximal end of the tubular body portion 82 includes a  
25 circumferentially raised section 86 to further aid a user in grasping the conduit 80.

Referring to Figs. 2 and 3, the conformal tip 12 generally comprises an elastic membrane 38 and a compliant, non-compressible material 40. The elastic membrane 38 is generally formed into the shape of an elongate pipe defining a central passage 58 (seen Fig. 4). The walls of the elongate pipe defined by the elastic membrane 38 further define  
30 an isolated internal volume 56. The internal volume 56 is filled with the compliant material 40. The pressure of the compliant material 40 within the volume 56 maintains the elastic membrane 38 in a substantially "filled" state. The elastic membrane 38 is preferably nonporous and smooth to facilitate cleaning and minimize the chance of infection when worn for extended periods of time. The membrane 38 can therefore be  
35 made of a number of suitable materials including but not limited to elastic urethanes such



as Tecoflex™ and Pellethane™. A number of commercially available elastic silicones can be used as well.

Semi-rigid, annular fastening ridges 34 are disposed around the inner diameter of the elastic membrane 38 on both the proximal and distal ends of the receiver module 16.

5 The fastening ridges 34 are made of e.g., silicone, and help to maintain the conformal tip 12 in a "filled" state. The fastening ridges 34 also aid in securing the conformal tip 12 to the receiver housing 16. Alternately, the conformal tip 12 can be secured to the receiver module 16 without the use of fastening ridges 34, but instead due to the resulting friction between the two components.

10 The receiver module 16 includes a rigid receiver housing 42 substantially enclosed by the conformal tip 12. A receiver unit 44, including the distal speaker 32, is enclosed within the receiver housing 42. The receiver housing 42 may, for example have a generally cylindrical shape and is preferably formed from the same material as the main module housing 28. Similar to the main module housing 28, the receiver housing 42 can  
15 also be formed from a medical grade stainless steel or other bio-compatible and moisture resistant material. As described below in conjunction with Figs. 7 and 8, it is not necessary for the receiver module 16 to be a cylindrical shape. Rather, various other receiver module shapes, each targeted toward a specific hearing device application, are also contemplated with the scope of the present invention.

20 A tapered opening 50 is provided at the proximal end of the receiver housing 42, which allows access to electrical contact elements 52 connected to the receiver unit 44. The main module 14 includes contact elements 54 coupled with the internal components 36 and 46, and is configured to engage with the receiver contact elements 52 and form an electrical connection. In this manner the sounds captured by the microphone 24 and  
25 processed by the sound processing electronics 46 are conveyed to the receiver 44 and subsequently amplified by speaker 32.

In a preferred embodiment, the main module contact elements 54 are inwardly spring biased, while contact elements 52 are outwardly spring biased. The spring biasing ensures a consistent electrical connection is maintained between the respective  
30 components. The spring biased connection between main module 14 and the receiver module 16, along with the tapered profile of the opening 50, forms the articulating joint 26. As shown by the directional arrows in Fig. 1, the main module 14 can pivot in any two dimensional plane about the joint 26 as well as rotate about the center axis "x" of the hearing device 10. The possible directions of movement of the main module 14 are  
35 represented by arrows  $\alpha$ ,  $\beta$  and  $\delta$  in Fig. 1. In particular, the articulating joint 26 allows the hearing device 10 to further conform to a variety of ear canal shapes.

Notably, Figs. 2 and 3 depict the hearing device 10 and more particularly the conformal tip 12 as they would appear when inserted into and subject to deformations caused by, the morphology of the ear canal. The diameter of the hearing device 10 with the engaged conformal tip 12 is preferably somewhat larger than a typical ear canal diameter, whereby the elastic membrane 38 will conform to the contours of the ear canal wall.

In particular, since the compliant material 40 within the membrane 38 is essentially non-compressible (e.g., water, saline, silicone gel, hydrogels or other fluid and elastic polymers) its volume remains constant. Thus, any deformation of the conformal tip 12 caused by compression from the ear canal wall will cause the elastic membrane 38 to stretch, creating a form fit with the contours of the particular ear canal wall, while simultaneously exerting a slight pressure on the ear canal walls. The amount of pressure exerted will vary depending on the elastic properties of the membrane 38. Any displaced volume of the compliant material 40 will squeeze the elastic membrane 38 over the ends of the receiver housing 42, further securing the conformal tip 12 to the receiver housing 42. The respective receiver module 16 and conformal tip 12 thereby form a substantially tight acoustic seal when inserted into the inner portion of an ear canal.

Since the internal lumen portion 84 of the conduit 80 is embedded within the conformal tip 12, it is preferably formed from a sufficiently flexible material that will conform to the changing shape of the conformal tip 12. Similarly, a distal end portion 92 of the tubular body portion 82 is also preferably formed from a more flexible material than the remainder of the body portion 82, so that when the articulating joint 26 moves, the distal end 92 of the conduit 80 will likewise move. Broken line 94 shows a preferred transition point between the flexible material portion 92 and the more rigid material of the remainder of tubular body portion 82.

Moreover, the material that forms the several portions 82, 84 and 92 of the conduit 80 is preferably resilient enough so that a consistent passageway is maintained from the proximal opening 88 to the distal opening 90. The passageway formed by the conduit 80 also allows sound waves that are generated within a user's head to naturally propagate to the ambient environment, thereby significantly reducing or eliminating acoustic feedback to the wearer. Therefore, the conduit 80 simultaneously provides an integrated venting and pressure equalization system, an extraction and insertion aid, and an acoustic feedback suppression system.

Fig. 4 shows an exploded view of the hearing device 10, including the conformal tip 12, the main module 14, and the receiver module 16. Each of the components 12, 14 and 16 are designed to be easily separated from each other and readily interchanged.

Preferably, variously sized conformal tips 12 are available to a physician or audiologist in order to fit a wide range of ear canal sizes. In this manner, a single size receiver housing 42 can be utilized. Only the conformal tips 12 would need to be interchanged to accommodate a particular user's ear canal.

5 In Fig. 4, the conformal tip 12 is shown in its normally "filled" state without any external force deforming its shape. The internal diameter "d" of the conformal tip 12 is preferably slightly less than the external diameter "D" of the receiver housing 42. When slid over the receiver housing 42, the elastic membrane 38 becomes slightly stretched and will grasp onto the exterior of the housing 42. The respective annular ridges 34 help  
10 maintain the shape of the conformal tip, when isolated from the receiver housing 42. Preferably, the receiver housing 42 is sufficiently smooth to allow the conformal tip 12 to easily slide over its outer surface. The conformal tip 12 is preferably configured so that, once engaged with the receiver housing 42, it will not interfere with the operation of filter 30 or speaker 32.

15 As seen in Fig. 4, the flexible portion 92 of the tubular body 82 of conduit 80 preferably includes a slightly tapered end 96, which facilitates attachment and removal of the tubular body 82 and internal lumen 84.

Fig. 5 shows a hearing device 10 engaged with a conformal tip 12, as it would sit within an ear canal 60. In a preferred embodiment, where the hearing device is a  
20 completely-in-the-canal (CIC) hearing device, the receiver module 16 and conformal tip 12 sit substantially within the inner bony portion 62 of the ear canal. In such a position, the receiver module 16, and in particular, the speaker 32, are in close proximity to the tympanic membrane (ear drum) 66. The main module 14 is located within the cartilaginous region 64 of the canal 60, but does not exert pressure on the wall of the ear  
25 canal since it is supported by the receiver module 16.

In Fig. 5, the conformal tip 12 is shown as it conforms to the contours of the ear canal wall 68. The overall external diameter of the conformal tip 12 is preferably slightly larger than the diameter of the ear canal 60 along the area where the receiver module is located, so that the elastic membrane 38, is "squeezed" into and conforms to the shape of  
30 the ear canal wall 68. In doing so, the conformal tip 12 exerts a slight outward pressure on the ear canal wall 68. Since the membrane 38 is elastic, some of the displaced volume of the compliant material is forced over the edges of the receiver housing 42. Only a slight pressure, sufficient to retain the hearing device 10 within the ear canal, is imparted on the ear canal wall 68. Thus, discomfort to the user is greatly reduced, or altogether  
35 eliminated.

The conformal tip 12 of the present invention is not limited to use with a CIC hearing device. For example, Fig. 6 depicts another type of in-the-canal hearing aid utilizing a preferred embodiment of the conformal tip.

Referring to Fig. 6, an elongate, single body in-the-canal (ITC) hearing device 110 employs a conformal tip 112 circumferentially attached around a distal end receiver module 116. The hearing device 110 is configured to extend through the entire length of the ear canal, with a proximal end faceplate housing 118 exposed within the fleshy external portion of the ear canal. The faceplate housing 118 includes controls 122 and a microphone 124. Located within the faceplate housing 118 are sound processing electronics 146 and a battery 136.

The main length of the hearing device 110 is formed from a semi-rigid shell 128 having an internal lumen 150. Within the lumen 150 is located a protective channel 152 for carrying data and electrical wires 154 from the electronics 146 to a receiver unit 144 located within the distal end receiver module 116.

In a preferred embodiment, the semi-rigid shell 128 can be adjusted to fit the shape of a particular ear canal. Co-pending U.S. patent application Serial Number 09/161,344 filed on September 25, 1998, assigned to the assignee of the present application, and which is fully incorporated herein by reference for all that it teaches, discloses a deformable hearing device shell. In particular, a heat deformable polymeric material is used to form the structure of the hearing device shell. When heated, the polymeric material assumes a plastic state and can be formed to match the precise geometry of an ear canal. When cooled to at or below a normal body temperature, the material returns to its normal glassy state and becomes rigid, thereby retaining the shape of the ear canal.

The receiver module 116, includes a rigid receiver housing 142 which encloses the receiver 144 and speaker 132. The rigid receiver housing 142 is adapted to receive an annular filter housing 130 about its distal end, which includes a hydrophobic and oleophobic replaceable filter membrane 131. Further details of such a filter housing are disclosed in the above-incorporated co-pending U.S. patent application Serial Number 09/161,344.

In Fig. 6, the conformal tip 112 is shown engaged with the receiver housing 142 in a similar manner as the conformal tip 12 is engaged with the receiver housing 42 in CIC hearing device 10 depicted in Figs. 1-5. The conformal tip 112 is shown as it would appear when inserted into an ear canal, wherein its shape is deformed along the contours of an ear canal.

The conformal tip 112 includes an elastic membrane 138, which forms an internally isolated volume 156. The volume 156 is filled with a compliant material 140.

Semi-rigid, annular fastening ridges 134 are disposed around the inner diameter of both ends of the elastic membrane 138 on both the proximal and distal ends of the receiver module 116. The fastening ridges 134 are made of e.g., silicone, and help to maintain the conformal tip 112 in a "filled" state. The fastening ridges 134 also aid in securing the conformal tip 112 to the receiver housing 116.

When inserted into the ear canal, the membrane 138, filled with the compliant material 140, conforms to the shape and contours of the bony inner ear canal wall, while also exerting a gentle pressure on the same portion of the ear canal wall. The hearing device 110 is thereby secured within the ear canal without causing appreciable pain or discomfort to the user. The hearing device 110 can utilize a single size receiver module 116, while incorporating variously sized conformal tips 112 in order to fit the size of a user's ear canal. As with the previously described device 10, the respective receiver module 116 and conformal tip 112 form a substantially tight acoustic seal when inserted into the inner portion of an ear canal.

A conduit 180 extends from a proximal opening 188 on the exterior surface of the faceplate 118 to a distal opening 190 on the distal end of the receiver module 116. The conduit 180 comprises a tubular body portion 182 attached to the exterior surface of the shell 128 and a lumen portion 184 extending through the conformal tip 112. The tubular body portion 182 forms an internal lumen 183 extending from the proximal opening 188 to a proximal opening 191 of the internal lumen portion 184. The internal lumen portion 184 extends from its proximal opening 191 to the distal opening 190. The respective lumens 183 and 184 are in communication with each other to thereby form a substantially uniform passage from the proximal opening 188 to the distal opening 190.

The tube portion 182 can be separated from the lumen portion 184, and includes a tapered distal end 196 to aid in inserting and removing the tube portion 182 from the lumen portion 184. Since the ITC hearing device of Fig. 6 is not seated deep within the ear canal like a CIC hearing device, it is not necessary to include a retrieval system. The faceplate sufficiently extends to enable a user to grasp its end and remove the hearing device. Since the entire length of the main module rigid housing 128 can be deformed, both the tubular body portion 182 and the wall 189 surrounding the internal lumen portion 184 are preferably made from a sufficiently flexible material to accommodate the deformation.

Notably, the conformal tip contemplate by the present invention is not limited to use with multi-module hearing devices. For example, Figs. 7 and 8 show a perspective view of a completely in-the-canal (CIC) hearing device 210 utilizing a preferred

conformal tip 212. The CIC hearing device 210 includes a single receiver module 214, rather than multiple modules as previously described in conjunction with Figures 1-5.

The receiver module 214 preferably comprises a rigid shell 228 formed, e.g., from a plastic, thermoplastic or other polycarbonate material. The rigid shell (or housing) 228 provides a lightweight, durable, bio-compatible housing for internal components of the receiver module 214, including a power source 236, microphone 224, receiver (not shown), speaker 232, and sound processing electronics (not shown). Alternately, the receiver module 214 can be formed from a medical grade stainless steel or other bio-compatible and moisture resistant material. Notably, the housing 228 provides protection of the internal components from moisture, dirt, and oil from cerumen (ear wax).

The receiver module 214 further includes a removable faceplate 218 covering an open end 220 of the housing 228. The faceplate 218 allows access to the components mounted inside of the receiver module 214. Located on the exterior of the faceplate 218 are controls 222 and a microphone 224. Briefly, the controls 222 provide the ability to adjust volume, sensitivity, or sound processing schemes. A compartment 226 is hinged to the receiver module 214 by a pin 216 and is also accessible from the exterior of the faceplate 218. Located within the compartment 226 is a power source 236 preferably in the form of a standard size hearing device battery. The hinged compartment 226 swings outward (as indicated by arrow 227) and allows easy replacement of the battery 236. The distal end 231 of the receiver module 214 further includes a speaker 232, which operates in conjunction with the electronics (not shown) housed within the receiver module 214.

The conformal tip 212 in Fig. 7 generally comprises an elastic membrane 238 and a compliant, non-compressible material 240. The elastic membrane is generally formed into the shape of an elongate pipe defining a central passage 258. The central passage 258 is shaped to easily and accurately fit over the correspondingly shaped portion 230 of the receiver module 214. The central passage 258 is substantially rectangular in shape so as to snugly engage with the rectangularly shaped portion 230 of the receiver module 214. The walls of the conformal tip 212 defined by the elastic membrane 238 further define an isolated internal area 256 filled with the compliant material 240. The pressure of the compliant material 240 within the area 256 maintains the elastic membrane 238 in a substantially "filled" or expanded state. The elastic membrane 238 is preferably nonporous and smooth to facilitate cleaning and minimize the chance of infection when worn for extended periods of time. The membrane 238 can be made of a number of suitable materials, including but not limited to elastic urethanes such as Tecoflex™ and Pellethane™. A number of commercially available elastic silicones can be used as well.

The conformal tip 212 also includes a portion 242 that extends from the circumference of the proximal end 250 of the conformal tip 212. The portion 242 is preferably formed from the same elastic material 238 and provides a skirt that partially encloses the open end 220 of the receiver module 214 when inserted into the conformal tip 212. The skirted portion 242 aides a user when guiding the receiver module 214 into the conformal tip 212. The proximal surface 246 of the conformal tip 212 allows a user to consistently insert the receiver module 214 into the conformal tip 212.

A conduit 280 serves as both a vent and a retrieval cord for the hearing device 210, and additionally aides in minimizing acoustic feedback. The conduit 280 comprises a proximally extending tubular body portion 282 extending from the proximal surface 246 of the conformal tip 212, and an internal distal lumen portion 284 extending through the conformal tip 212. The tubular body portion 282 and the internal lumen portion 284 together form an internal lumen 283 extending from a proximal opening 288 of the tubular body portion 282 to a distal opening 290, which is located near the distal end 231 of the receiver module 214 when the receiver module 214 is inserted into the conformal tip 212. The lumen 283 defines a substantially uniform passage from the proximal opening 288 to the distal opening 290.

In particular, when the hearing device 210 is inserted deeply into an ear canal, the lumen 283 allows air and sound waves to flow freely between a chamber (reference number 98 in Fig. 5) formed between the distal end 231 of the receiver module 214 and the tympanic membrane, and the ambient air. Due to the air tight seal formed between the conformal tip 212 and the ear canal wall, pressure builds up in the deep portion of the ear canal, near the tympanic membrane. The passage created by the conduit 280 prevents an increase in this pressure by acting as a vent between the deep portions of the ear canal and the ambient air.

In addition to providing a pressure vent for the hearing device 210, the conduit 280 also allows a user, physician or audiologist to easily insert and remove both the receiver module 214 and the conformal tip 212, from within the ear canal. In particular, the proximal end of the tubular body portion 282 extends proximally (i.e. towards the opening of the ear when the device is inserted in an ear canal) beyond the operative end 220 of the receiver module 214. This proximally extending portion of the tubular body portion 282 is preferably long enough so that the wearer can grasp it securely between two fingers and remove (i.e. pull) the hearing device 210 from the ear canal. The proximal end of the tubular body portion 282 includes a circumferentially raised section 286 to further aid a user in grasping the conduit 280.

In order to effectively remove both the conformal tip portion 212 and the receiver module portion 214, the internal lumen portion 284 of the conduit 280 is firmly engaged to the conformal tip 212. Preferably, the internal lumen portion is bonded to the elastic membrane 238 by a suitable adhesive. The resulting structural integrity of the conduit 280  
5 eliminates the need to have a bulky structure in the conformal tip 212.

While the embodiment shown in Figs. 7 and 8 shows the conduit forming a portion of the conformal tip portion 212, the conduit 280 can alternately be bonded to and form a part of the receiver module 214. In this manner, the conformal tip portion would slide over both the receiver module 214 and the conduit 280.

10 Fig. 8 shows the receiver module 214 while engaged within the conformal tip 212 and, particularly, how the proximal surface 246 limits the insertion distance of the receiver module 214. The skirted extension 242 is also shown partially enclosing the receiver module 214.

15 Although the invention has been described and illustrated in the above description and drawings, it is understood that this description is by example only and that numerous changes and modifications can be made by those skilled in the art without departing from the true spirit and scope of the invention. The invention, therefore, is not to be restricted, except by the following claims and their equivalents.







Claims

1. A hearing device, comprising:  
a receiver module, having a substantially rigid housing with an outer surface;  
5 and a removable conformal tip having a generally tubular body configured to snugly fit over and substantially cover the outer surface of the receiver module housing, the conformal tip including  
a substantially elastic membrane defining an internally isolated volume,  
the elastic membrane having an inner diameter and an outer diameter, and  
10 a substantially non-compressible compliant material occupying the internally isolated volume.
2. The hearing device of claim 1, wherein the device is an in-the-canal device.
- 15 3. The hearing device of claim 1, wherein the device is a completely-in-the-canal device.
4. The hearing device of claim 1, the elastic membrane having first and second ends, the conformal tip further comprising a first annular fastening ridge  
20 disposed around the inner diameter of the first end and a second annular fastening ridge disposed around the inner diameter of the second end.
5. The hearing device of claim 4, wherein the first and second fastening ridges help secure the conformal tip to the receiver module housing.
- 25 6. The hearing device of claim 1, wherein the conformal tip is secured to the receiver module housing by an interference fit.
7. The hearing device of claim 1, the receiver module housing further having a  
30 distal end surface at least partially covered by the conformal tip.

8. The hearing device of claim 1, wherein the receiver module and conformal tip form a substantially tight acoustic seal when inserted into the inner portion of an ear canal.
9. The hearing device of claim 1, wherein the compliant material comprises at least one of water, saline, silicone gel, hydrogel or elastic polymer.
10. The hearing device of claim 1, the outer surface of the receiver module housing having an outer diameter, wherein the inner diameter of the elastic membrane in a non-elongated state is slightly less than the outer diameter of the outer surface of the receiver module housing.
11. The hearing device of claim 1, wherein the receiver module housing outer surface has a generally cylindrical shape.
12. The hearing device of claim 1, wherein the receiver module housing outer surface has a generally rectangular shape.
13. The hearing device of claim 1, wherein the receiver module has a proximal end and the hearing device further comprises a second module pivotally connected to the proximal end of the receiver module.


1/5

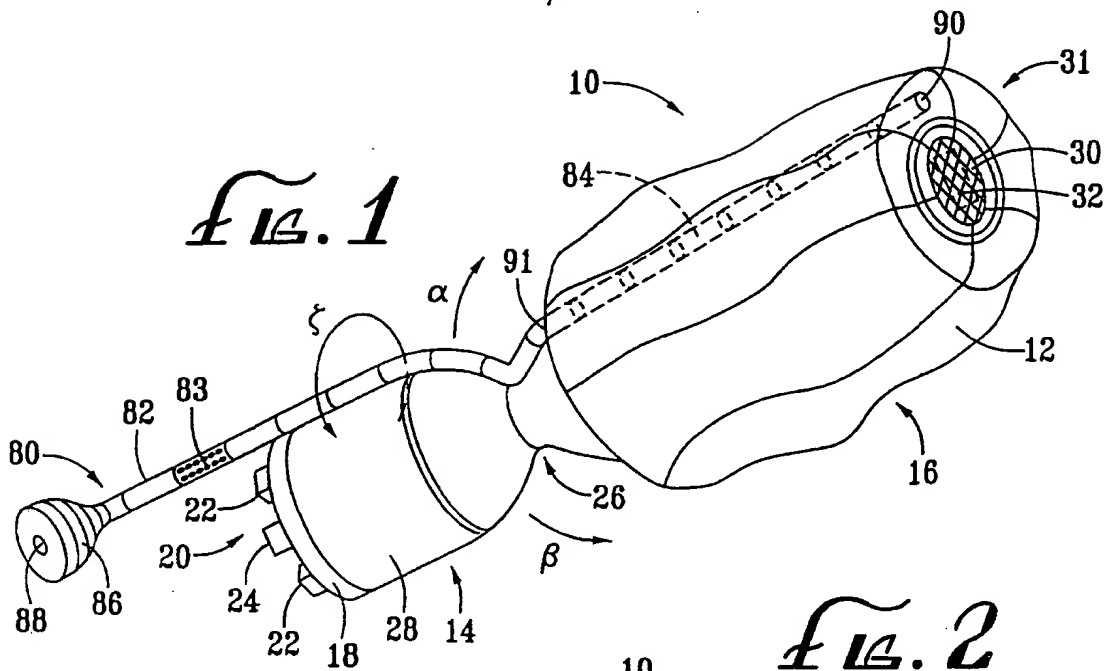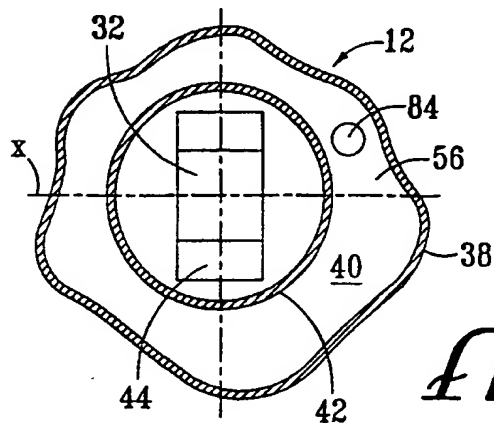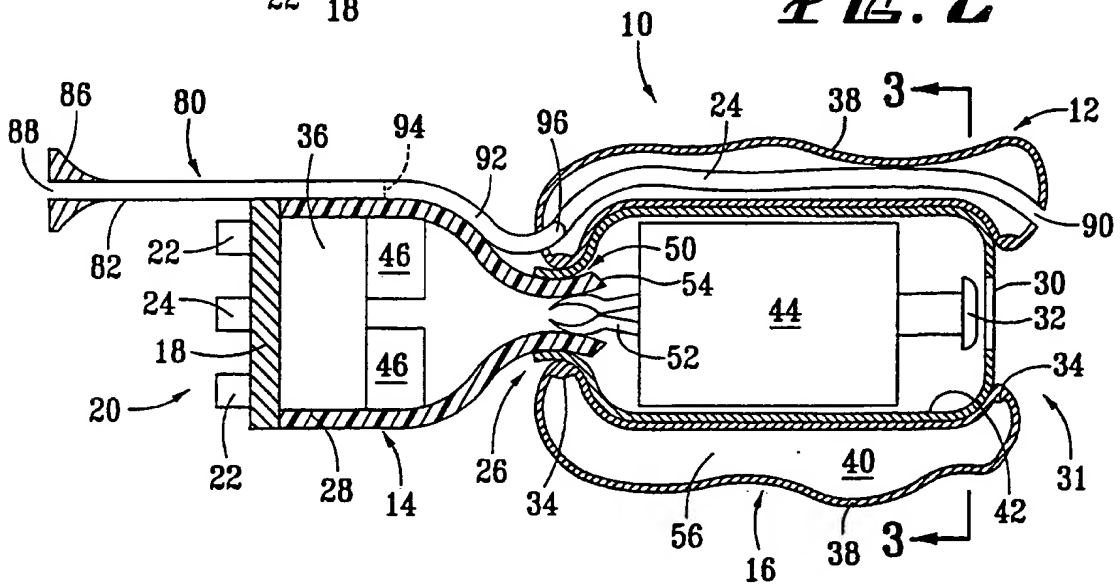
*Fig. 1**Fig. 2**Fig. 3*

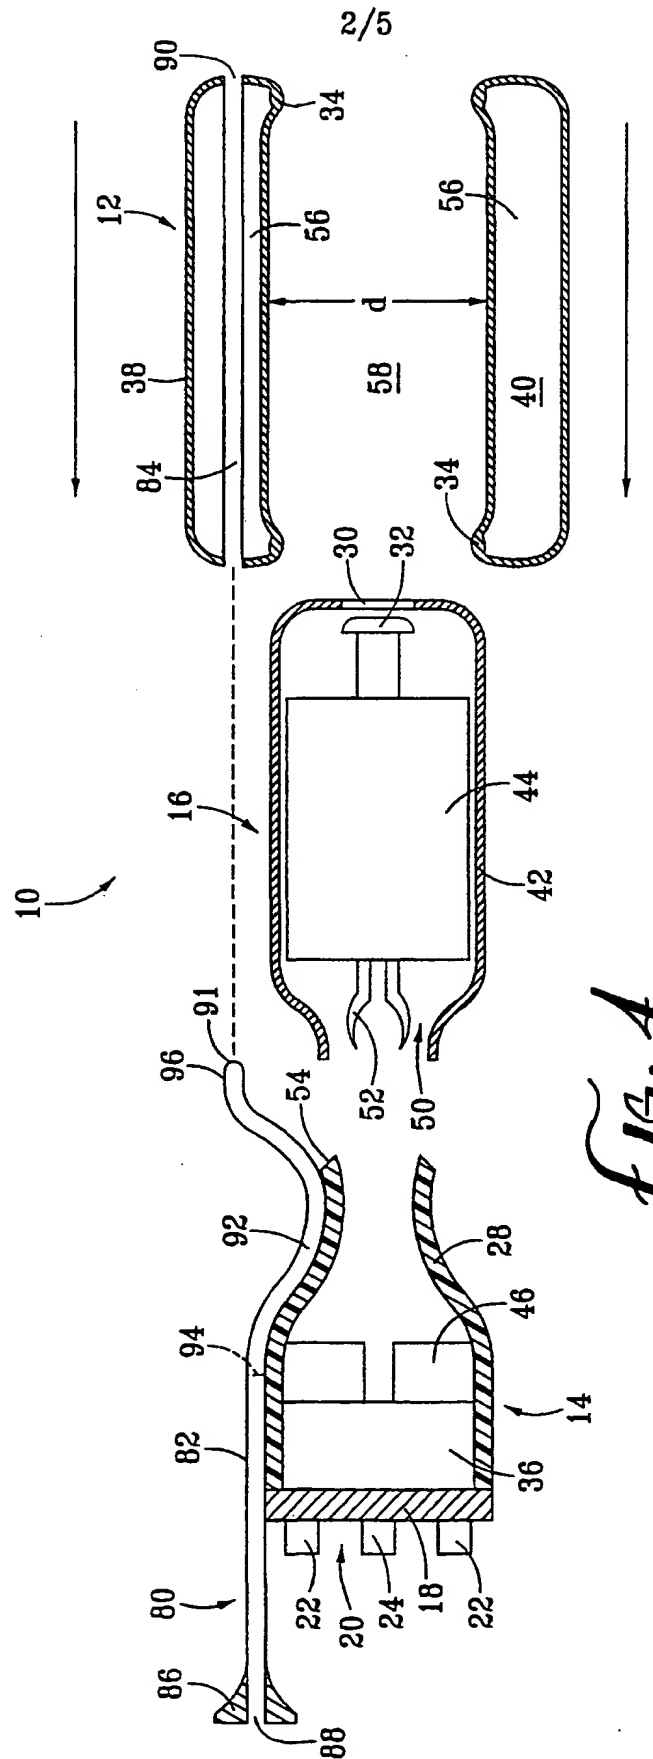

**SUBSTITUTE SHEET (RULE 26)**

Fig. 5

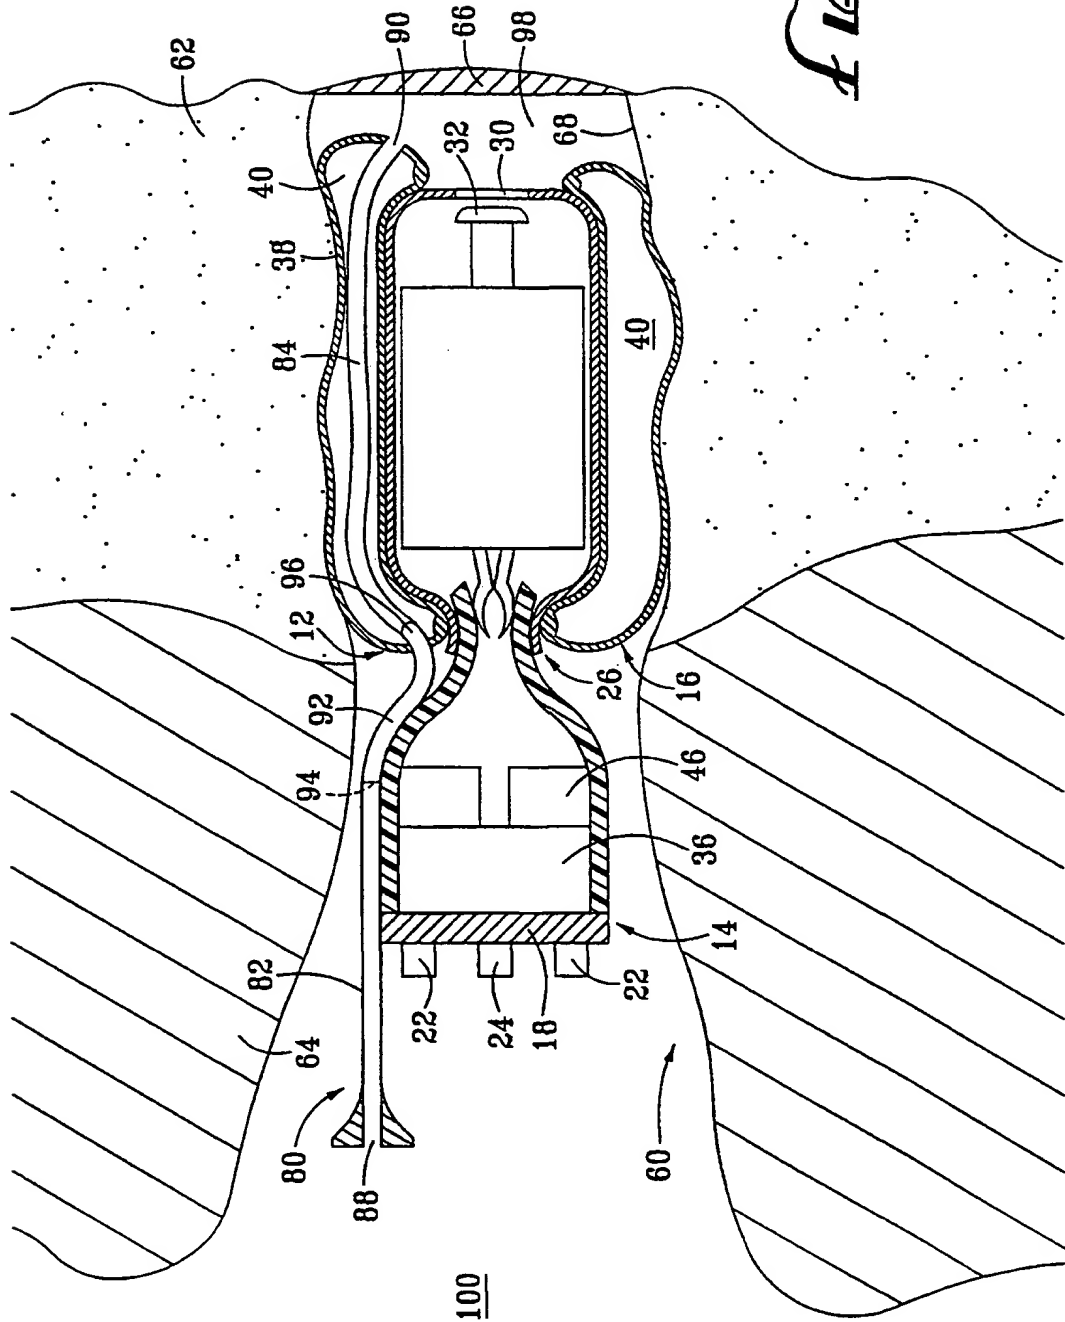

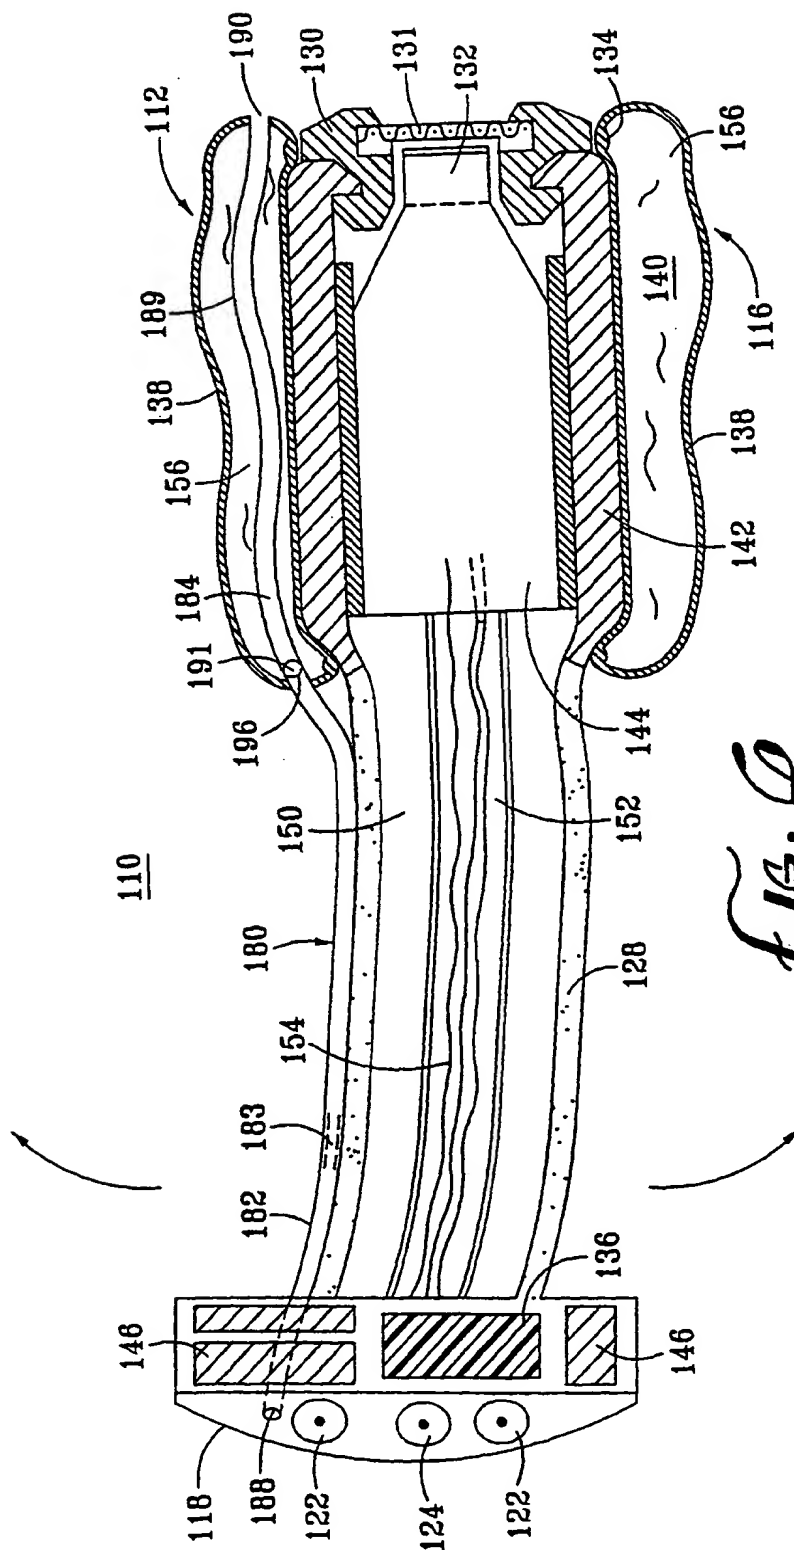

**SUBSTITUTE SHEET (RULE 26)**



8. 71 f

BNSDOCID: <WO\_\_\_\_\_0042815A1\_I\_>

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/00830

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 H04R25/00 H04R25/02

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04R A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 43 39 899 A (LUX WELLENHOF GABRIELE) 1 June 1995 (1995-06-01) column 1, line 66 -column 2, line 36 column 3, line 20 -column 4, line 38 column 6, line 8 - line 35; figures 1A-1C, 2, 3, 9A-9C	1-3, 6-11
Y	—	4, 5, 12, 13
Y	US 5 701 348 A (SHENNIB ADNAN ET AL) 23 December 1997 (1997-12-23) cited in the application column 6, line 60 -column 7, line 31 column 7, line 60 -column 8, line 5 column 9, line 61 - line 63 column 11, line 12 - line 32; figures 3, 4, 18, 23	4, 5, 12, 13
	— -/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

22 March 2000

Date of mailing of the international search report

26/04/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Nieuwenhuis, P



# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 00/00830

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 825 896 A (LEEDOM MARVIN ALLAN) 20 October 1998 (1998-10-20) abstract	3,13

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/00830

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 4339899 A	01-06-1995	AT 170699 T WO 9515067 A DE 59406852 D EP 0730811 A EP 0855847 A	15-09-1998 01-06-1995 08-10-1998 11-09-1996 29-07-1998
US 5701348 A	23-12-1997	AU 706468 B AU 4611596 A BR 9510413 A CA 2209068 A CN 1176731 A EP 0800751 A JP 10512116 T PL 321022 A WO 9621334 A	17-06-1999 24-07-1996 10-11-1998 11-07-1996 18-03-1998 15-10-1997 17-11-1998 24-11-1997 11-07-1996
US 5825896 A	20-10-1998	NONE	

Form PCT/ISA/210 (patent family annex) (July 1992)

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**